


Roof Deck



Rose Street
Inverness

Intermediate Deck

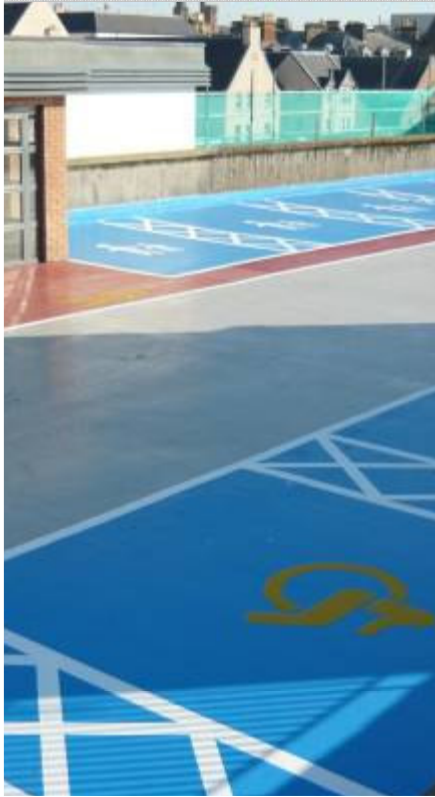

Basement Deck



Project	Rose Street car park refurbishment
Main Contractor:	McGregor Construction (Highlands) Limited
Architects:	Keppie Design
Date:	2008
Size:	19,600m ²
Specialist Contractor:	Decon Ltd
Products:	Deckmaster system R, ID, & HFS

The Deckmaster system R has been applied onto the access to roof levels 9 & 10.

The intermediate levels have had Deckmaster ID applied with colour coded parking bays traffic aisles and pedestrian walkways. A High Build marking system has been used for all directional signage.

The Deckmaster HFS system has been applied to levels 1a, 2, & 2a, overlaying the existing tarmac surface. Due to the high water table in the basement area the Deckmaster DPM/Bonder was applied ahead of the HFS system